


Kawasaki Bracket Installation

With Dual Air Intake

This installation kit includes:

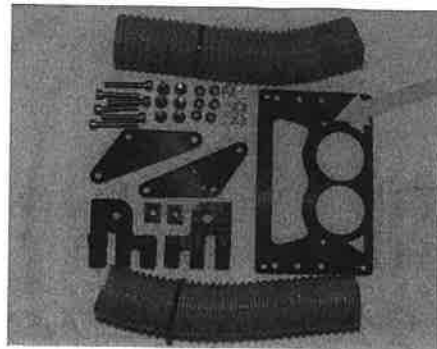

Hole for stopper block

Instructions:

- 1- Remove gas tank. Put the plate on the hull and bolt together temporarily.
- 2- Drill two holes (drill size 5/16 or 8mm) to put stopper blocks.
- 3- With a 2 ½ inches or 64 mm hole saw, drill the air inlet through the hull.
- 4- Take the plate off and assemble the bracket together. Install bracket on the hull with pole stopper block and install the under plate for reinforcement.
- 5- Install zip ties at 8 inches (20 cm) on flexible tubes. Refer to Illustration 1. Zip ties will prevent the tubes to slide in the hull once installed.
- 6- Install flexible tubes inside lower part of pole without aluminum tube in pole. Refer to Illustration 2.
- 7- Install lower part of pole to the bracket and slide the tubes into the air inlet.
- 8- Install pivot bolt to bracket and make sure you pull flexible tube so you do not puncture flexible tube while you put the bolt through.



Illustration 1

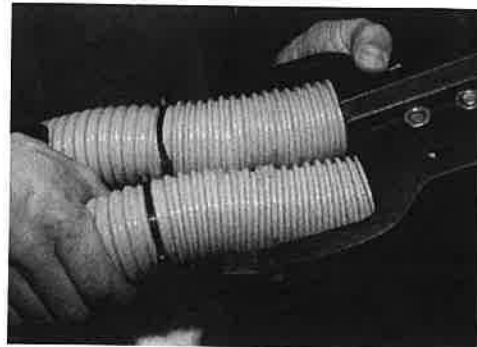


Illustration 2



When you install the gas tank back, make sure the flexible tubes do not clog on the tank. If so, cut the flexible tubes until they do not touch and can breathe easily.

Then follow installation instructions for the handle pole.

When you install aluminum tube in lower part of the pole, don't go pass closing the window because you will push the flexible tube out of the bottom piece of the pole.

Questions or comments?

For further assistance, visit www.rickroy.com or contact us at rickroy@rickroy.com

DISCLAIMER:

RRP shall have no liability for special, incidental or consequential damages or injury to persons or property from any cause arising from the sale, installation or use of this product.